



The long and the short of it is....

The highly successful ICU Condenser has a new partner, **the ICUS**.

Both have the same **high quality** of build and components, both carry up to **3 years parts/labour warranty** and all Qualitair products are built in our **UK factory**.

The small difference is that the ICU can handle up to 100 metres of pipe, whereas the ICUS is designed for 25 metres.

The **big difference** is that the **price** of the ICUS is substantially **lower**.

So ask for details and price from your nearest Wholesaler or call Qualitair on 01782 597124.

QUALITAIR

ICU & ICUS — NEW CONDENSER RANGE

- Weatherproof painted cabinet with draw through fan assembly.
- Access door to compressor and controls compartment on the front of the unit.
- Up to 100 metre pipe run ICU (30 metre (ICUS)).
- Low starting current and noise levels.
- Compact small footprint.

Factory Fitted Items:

- HP/LP.
- Fan Speed Controller.
- Winter Start Kit.
- Flared Connection / Shut-off Valves.
- R407c Charge. 5 metre (ICU) / OFN (ICUS).

The ICUS brings the benefits that have always been associated with QUALITAIR products including being built in our own factory in the UK using only high specification materials, components and labour.

This together with our comprehensive 3 year Warranty gives you the confidence that they will deliver performance and continue to work in a hard environment without unnecessary call-backs for years to come.

So if your application does not call for the ICU, such as long 100 metre pipe runs, then use the new ICUS which gives you the same high quality but substantial price savings.


Below is basic data but all dimensions and other details are as the ICU brochure.

ICC Cellar Cooler and Condenser Options

Indoor Unit				Condenser				System					
Model	kW @ 12.7°C	kW @ 5°C	Optional Electric Heater kW	Model	Pipe Run Max. m	Model	Pipe Run Max. m	FLC		LRC		HRE Fuse	
								230/1/50	400/3/50	230/1/50	400/3/50	230/1/50	400/3/50
ICC25	2.4	1.85	3.0	ICU30	30	ICUS30	25	3.3	—	19.0	—	10.0	—
ICC35	3.5	2.6	3.0	ICU40	30	ICUS40	25	6.6	—	28.0	—	10.0	—
ICC50	4.5	3.7	3.0	ICU55	100	ICUS50	30	10.6	—	53.0	—	16.0	—
ICC50	5.8	4.7	3.0	ICU80	100	ICUS80	30	16.1	6.0	82.0	33.0	20.0	10.0
ICC60	6.1	5.0	4.0	ICU80	100	ICUS80	30	16.1	6.0	82.0	33.0	20.0	10.0
ICC70	6.8	5.4	4.0	ICU80	100	ICUS80	30	16.1	6.0	82.0	33.0	20.0	10.0


Model	Height (A) mm	Width (B) mm	Depth (C) mm	Weight kg	SV Sizes	
					Suction	Liquid
ICU30 and ICUS30	610	720	250	32	5/8"	1/4"
ICU40 and ICUS40	610	720	250	42	5/8"	1/4"
ICU55 and ICUS55	765	800	320	60	5/8"	1/4"
ICU80 and ICUS80	765	800	320	64	3/4"	3/8"

ICC indoor unit

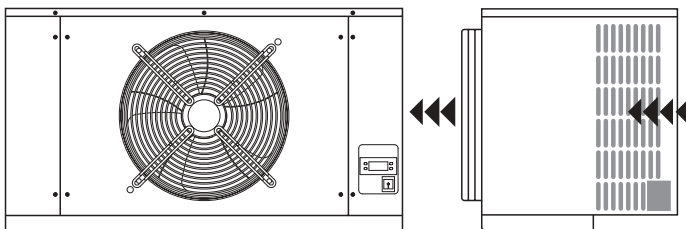

Note: For further information on ICC units please refer to ICC brochure.

ICU and ICUS outdoor unit

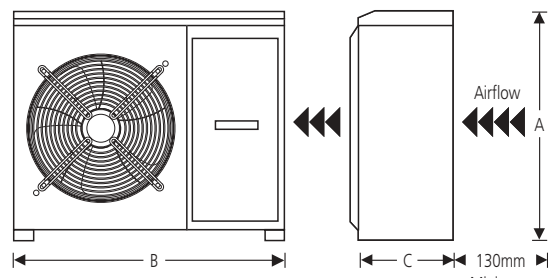

Note: For further information on condensing units please refer to ICU brochure.

130mm
Minimum distance from wall



Eaton-Williams Air Conditioning
Oldfields Business Park
Birrell Street, Fenton
Stoke-on-Trent ST4 3ES
Telephone: +44 (0)1782 597124
Facsimile: +44 (0)1782 316633
www.eaton-williams.com

We reserve the right to alter specifications without notice and products will sometimes be supplied with modifications which do not strictly comply with the descriptions and illustrations in this publication.